


KIDS WALL DOUBLE DECKER

HARDWARE




- 1/4" X 3/4" Bolts
- 1/4" x 1-3/4" Bolts
- 1/4" x 3/8" Set Screws
- 1/4" Washers
- 1/4" Stopnuts
- 5/16" x 1/2" Bolts
- 5/16" x 3/4" Bolts
- 5/16" Washers
- 5/16" Stopnuts
- 1" Black Plugs

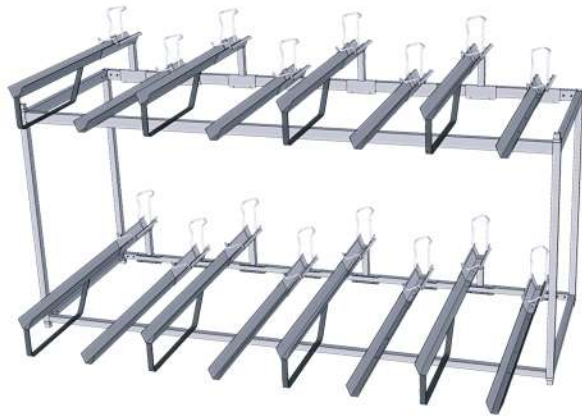

Low Tray



High Tray

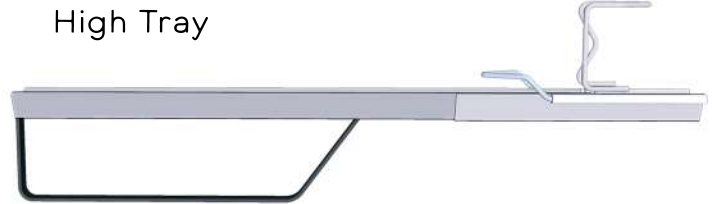

Safety Stop




Top Low Slide



Bottom Low Slide



Top High Slide




Bottom Crossbar



Top Crossbar



Corner Post

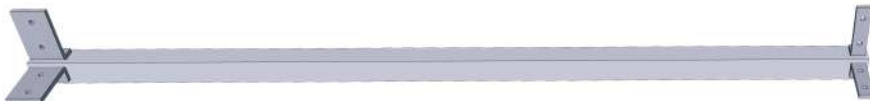

Bottom Rail




Top Rail



Bottom High Slide



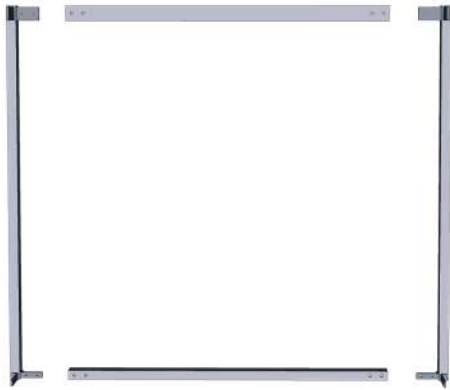


STEP ONE

Locate your Corner Posts, Top Crossbars, and Bottom Crossbars. Lay out the two Corner Posts and a Top and Bottom Crossbar as shown flat on the floor. Slide the ears from the Corner Posts into the ends of the Crossbars. Secure using 5/16" x 1/2" Bolts and 5/16" Washers.

DO NOT TIGHTEN DOWN


Repeat with remaining Corners and Crossbars, creating two end subassemblies

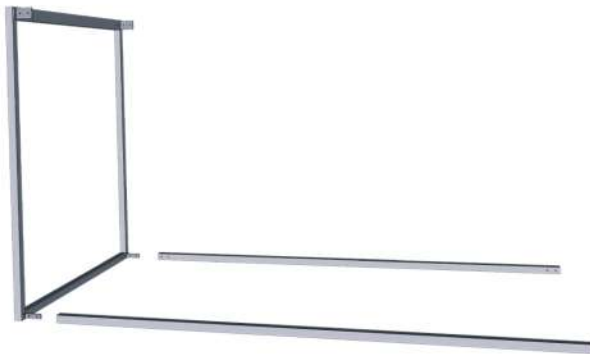

STEP TWO


Locate your Bottom Rails. Take one of the now assembled end sections and stand it up with the small ears on the bottom. Slide the Bottom Rails over the ears and align the holes as shown. Using 5/16" x 1/2" Bolts and 5/16" Washers, secure bottom rails to the end assembly.

DO NOT TIGHTEN DOWN

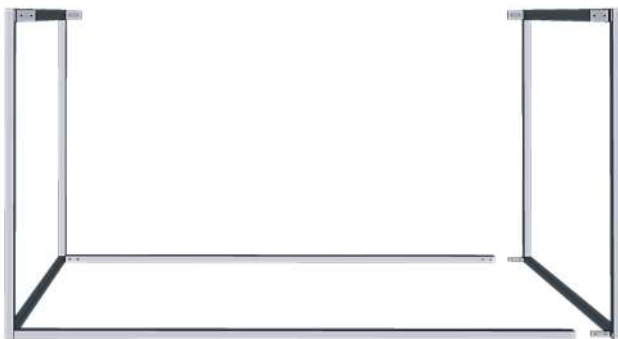

STEP THREE

Repeat step 2 with remaining end subassembly, as shown.

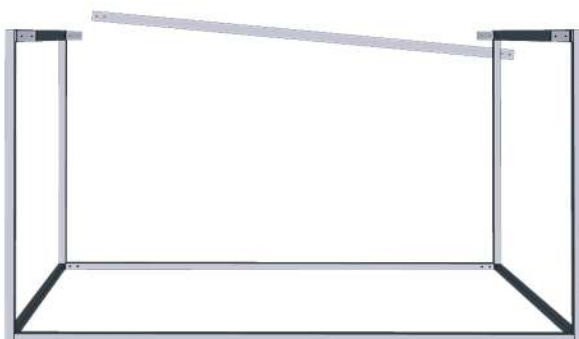

STEP FOUR


Next take one of the Top Rails and slide one end of the rail over one of the remaining exposed ears. then slide the other end of the rail over the corresponding ear on the other end, as shown.

Secure the rail to the end posts using 5/16" x 1/2" bolts and 5/16" washers.

DO NOT TIGHTEN DOWN




STEP FIVE

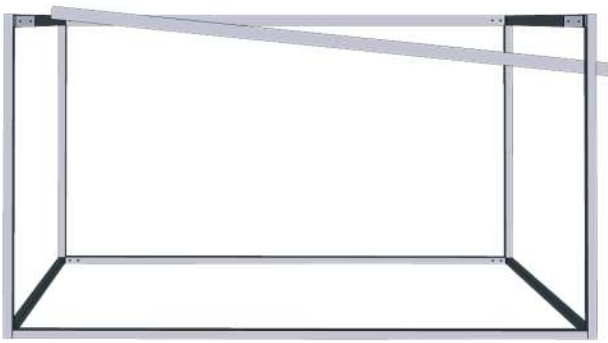

Repeat step 4, securing the remaining Top Rail to the Corner Posts, as shown.

GO BACK AND TIGHTEN ALL BOLTS ON THE STRUCTURE DOWN SECURELY!

RACKS THAT DO NOT UTILIZE TRAYS ON THE BOTTOM TIER WILL NOT HAVE SAFETY STOPS INCLUDED AS "FEET" FOR THE RACK.

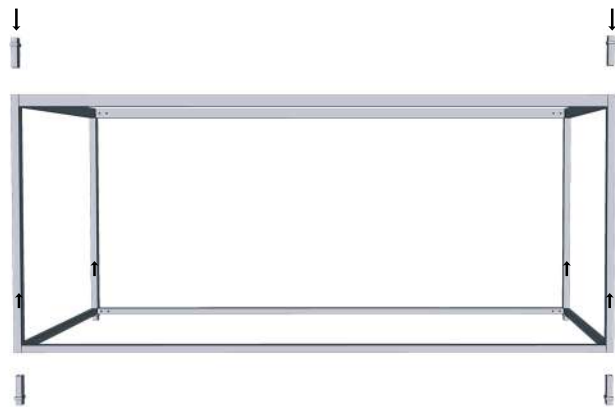


STEP SIX



INSERT 1" BLACK PLUGS INTO 4 OF THE SAFETY STOPS. SLIDE THEM INTO THE BOTTOM OF THE CORNER POSTS ONE AT A TIME, AS SHOWN, GIVING THE RACK "FEET."

PLACE THE LAST 2 SAFETY STOPS IN THE CORNERS OF THE FRONT TOP TIER.


STEP SEVEN

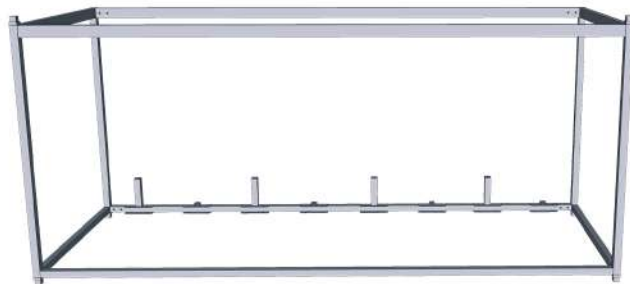

Locate the Bottom High Slides and Bottom Low Slides. Start at one end of the Bottom Rear Rail and slide them onto the rail, alternating high and low (or low and high.)

Once satisfied with the spacing secure tightly to the rail using 1/4" x 1-3/4" Bolts and 1/4" Stopnuts.

STEP EIGHT

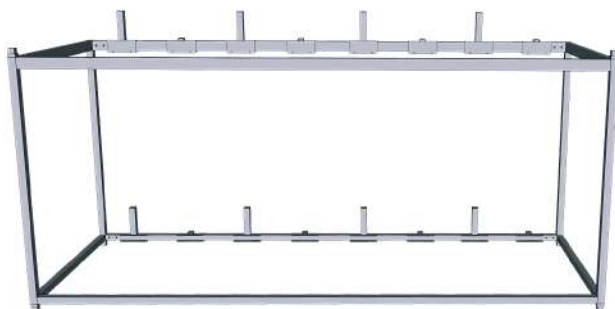

Locate the Top High Slides and Top Low Slides. Start at one end of the Top Rear Rail and slide them onto the rail, alternating high and low to match the bottom tier.

Secure using 1/4 x 1-3/4" Bolts and 1/4" Stopnuts.



STEP NINE: TRAY ASSEMBLY

** Determine number of Top and Bottom Tier High and Low Trays before beginning. **



Kids Stanchion



Kids Stanchion Base Tray





Kids Stanchion Catch



Kids Tray

1. Place the Kids Tray into the Kids Stanchion Base Tray. Attach using (2) 1/4" x 3/4" Bolts, (4) 1/4" Washers, and (2) 1/4" Stopnuts. We recommend 48" trays for the top tier and 54" trays for the bottom. Depending on the tray length, use these holes for attachment:

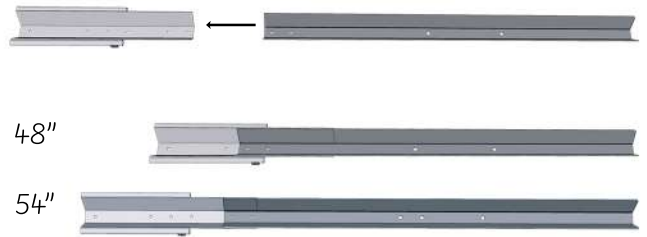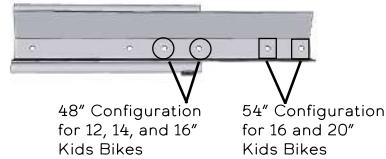

2. On the 48" option only:

The Kids Stanchion now attaches to the Kids Stanchion Base Tray using (1) 5/16" x 3/4" Bolt, (2) 5/16" Washers, and (1) 5/16" Stopnut.



Complete the tray assembly by sliding the two ends of the Kids Stanchion Catch into the open ends of the Kids Stanchion Base Tray tubes. Secure in place using (1) 1/4" x 3/8" Set Screw.



** THE 54" TRAYS ARE COMPLETED IN STEP TEN AFTER THE TRAY IS ATTACHED TO THE RACK. TRAYS ARE LOADED ONTO THE BOTTOM TIER OF THE RACK FIRST.*

STEP TEN:


Bottom Tier 54" Tray Assemblies are attached to the rack first. High Trays attach to Bottom High Slides and Low Trays attach to Bottom Low Slides.

Line up the back of the tray with the slide, place the Kids Stanchion inside the tray, and attach both to the slide with a bolt and washer.

Attach High Trays using 5/16" x 3/4" Bolts and 5/16" Washers.

Attach Low Trays using 5/16" x 1/2" Bolts and 5/16" Washers.

Repeat with all of the 54" Bottom High and Low Trays.

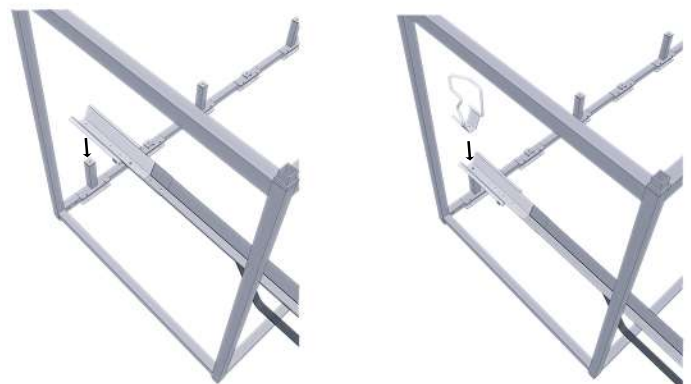

STEP ELEVEN:


The Top Tier 48" High and Low Tray Assemblies are now attached to the rack.

High Trays attach to Top High Slides and Low Trays attach to Top Low Slides.

Attach High Trays using 5/16" x 3/4" Bolts and 5/16" Washers.

Attach Low Trays using 5/16" x 1/2" Bolts and 5/16" Washers.

Repeat with all of the 48" Top High and Low Trays.

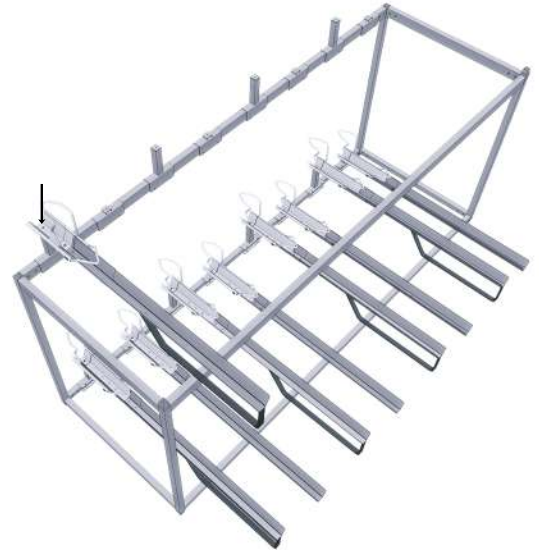

YOUR RACK IS NOW COMPLETE!

