

Cart Tower - 2 Tier Starter

Parts List

(1) 48" Vertical Post

(2) Cart Tower Arm

(1) Base

(4) Arm Catch Rod


(4) Arm Catch Slide

Hardware:


- (7) 5/16" x 1/2" Bolts
- (8) 1/4" x 3/8" setscrews
- (4) 3/4" Black Plugs
- (5) 1 1/4" Black Plugs
- (1) Rudy Rack Sticker

Cart Tower

2 Tier Starter & Add-on

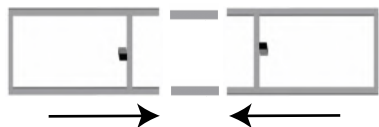

1. Assemble (2) Bases together using the (2) 6" Base Splices. Tighten down using (4) 1/4" x 3/8" setscrew.

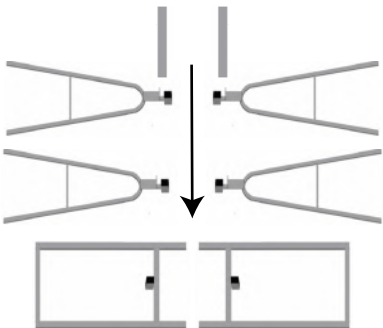


2. Slide (2) Cart Tower Arms onto each of the (2) 48" Vertical Posts so the Cart Tower Arms are facing away from the weld tab at the top of the (2) 48" Vert Post. Use (2) 5/16" x 1/2" Bolts on each Cart Tower Arm to tighten them down at your desired height.


3. Insert the 48" Vertical Post into the Base, weld tabs should be facing upward. Use (3) 5/16" x 1/2" Bolts to tighten the (2) 48" Vertical Posts into place.



4. Insert the Crown into the ends of the (2) 48" Vertical Posts. Tighten down with (2) 1/4" x 3/8" Setscrew.



5. Insert (1) Arm Catch Rod into each (1) of the Arm Catch Slides to make the arm catch assemblies. Tighten down using (1) 1/4" x 3/8" Setscrew.



6. Slide (2) of the Arm Catch Assemblies onto each Cart Tower Arm. Tighten down using (1) 1/4" x 3/8" Setscrews per Arm Catch.

7. Insert the provided (4) 1 1/4" Black Plugs and the (8) 3/4" Black Plugs into the exposed ends to give the Cart Tower a finished look.



Thank you for your purchase with Rudy Rack.