




DOUBLE BIKE STABLE

CAPACITY	2 Bikes Parked
GENERAL INFORMATION	<p><u>Materials:</u></p> <ul style="list-style-type: none"> - Base plate is 1/4" flat steel - Wheel & Locking Loops are 3/16" x 1-1/4" steel - Vertical Post is 2" sq. 14 gauge steel tube - Horizontal Posts are 1-1/4" sq. 14 gauge steel tube <p><u>Raised Wheel Loops :</u> 2-3/4" wide, spaced 17" center-to-center. Holds tires up to 2-3/4" wide.</p> <p><u>U-Lock Compatible Locking Loops</u></p> <p><u>Floor/Ground Mount</u></p> <p><u>Finish:</u> Black Thermoplastic Powder Coat</p> <p><u>Mounting Hardware:</u> 3/8" x 2-3/4" Wedge Anchor, 304 Stainless Steel is supplied for concrete mounting. Different anchors may be needed for other surfaces, which are not included.</p>
LAYOUT GUIDELINES	<p>Allow for a depth of 5' for bicycles and a 3' loading aisle</p> <p>Recommended spacing between plates is 13"</p> <p>Allow for 14" in front of rack</p>

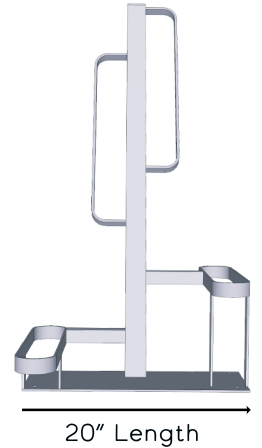

Having a small footprint and high security, the Double Bike Stable maximizes your bicycle storage space. It measures only 20" wide and 38" high, making it suitable for both indoor and outdoor use.

Parking 2 bikes is uncomplicated: the bikes are offset to reduce handlebar interference and raised wheel loops keep bikes upright.

With 2-3/4" wheel loops on the bottom and U-Lock compatible locking loops on the top, bikes are protected from damage by a corrosion-resistant black thermoplastic powder coat.



800-434-6442
 3201 DIXON STREET
 STEVENS POINT, WI 54481
 LAURA@RUDYRACK.COM
 WWW.RUDYRACK.COM